

# FDKU026-D-X

## PHOTOELECTRIC SMOKE DETECTOR

### Features

- Very Low Profile (28.7mm/1.13-inch only in height)
- Wide Alarm Set-point Range of 3.4 to 11.6%/m (1.05 to 3.69%/foot)
- True Analog Detector
- UL listed Smoke Calibration and Sensitivity
- Simple and Accurate Address Setting without Mechanical Switches
- LEDs for 360° Viewing



### Description

The Photoelectric Smoke Detector (FDKU026-D-X) is an Analog/Addressable smoke detector compatible with any fire alarm control panel of Integlex Multicrest series. The detector and base (not included) are made of a durable plastic in an eggshell white (off white) to blend in with the ceiling.

The new Nohmi circuit integration technology was introduced to the FDKU026-D-X. This state-of-the-art technology was able to simplify the product circuits and down-size the product structure significantly.

The FDKU026-D-X has an alarm set-point range of 3.4 to 11.6%/m (1.05 to 3.69% per foot) and is UL listed. The FDKU026-D-X can be configured for drift compensation and has built in dirty detector warning as well as. The FDKU026-D-X and the control panel communicate over a proven and robust digital communication path and the system analyzes the level of alarm at the particular device. The total polling speed is less than five (5) seconds, well under the UL requirements.

The FDKU026-D-X has two LEDs that allow for 360° viewing. The detector is compatible with any of the Nohmi bases indicated in this sheet and simply twists on. The FDKU026-D-X is addressed using the hand held programmer or the control panel addressing function.

### Ordering Information

Model no. FDKU026-D-X

### Air Velocity Ratings

The FDKU026-D-X has an Open Area of Protection air velocity rating of 0 to 91.4 m (300 feet) per minute.

The FDKU026-D-X is UL listed on maximum 9.1m (30 feet) spacing limitation on smooth ceiling.

Refer to NFPA 72 for specific information regarding detector spacing, placement, and special applications.

### Specifications

No.	Item	Specification
1	Working voltage range	22.0 to 24.0 V
2	Standby current	250 $\mu$ A
3	Alarm indicator	2 LEDs
4	Alarm indicator current	1.5 mA D.C
5	Alarm set-point range	3.4 to 11.6 %/m (1.05 to 3.69 %/foot)
6	Installation temperature range	0°C to 49°C (32°F to 120°F)
7	Operating relative humidity range	0% to 93% (Non-condensing)
8	Start-up time	Max. 1 sec.
9	Color	Eggshell White
10	Weight (without base)	75g (2.65 oz)
11	Dimensions (without base)	Height: 28.7mm (1.13 inch) Diameter: 99mm (4.0 inches)

### Setting the Address

Each addressable module, smoke detector, heat detector and combination detector must have the address set before connecting the device to the Signaling Line Circuit (SLC) loop. The address is set using the hand held device programmer or the addressing feature on the control panel.


## Compatible Bases

All bases will mount on a single gang, double gang, octagon, 4 inches square or mud ring electrical box.

No.	Device	Description
1	FZBU004-AB4	4 inches Standard Base
2	FZBU003-AB6	6 inches Standard Base
3	FZBU013-2Z	4 inches Standard base, 2 terminals (without remote indication circuit)
4	FZBU013-4Z	4 inches Standard Base, 4 terminals
5	FZBU005-AIB	6 inches base that has an isolator module included. The base is pre-wired with a pluggable jumper to the module.
6	FZBU005-ARB	6 inches base that includes a dual relay module. One relay is rated for 8 amps at 240 VAC/30 VDC and the second is rated for 2 amps at 240 VAC/30 VDC. The base is pre-wired with a pluggable jumper to the module.
7	FZBU005-ASB	6 inches base with sounder module included. Sound pattern is provided from external source. The base is pre-wired with a pluggable jumper into the module.

## Wiring Diagram

Typical wiring of detector base onto which detector is mounted.

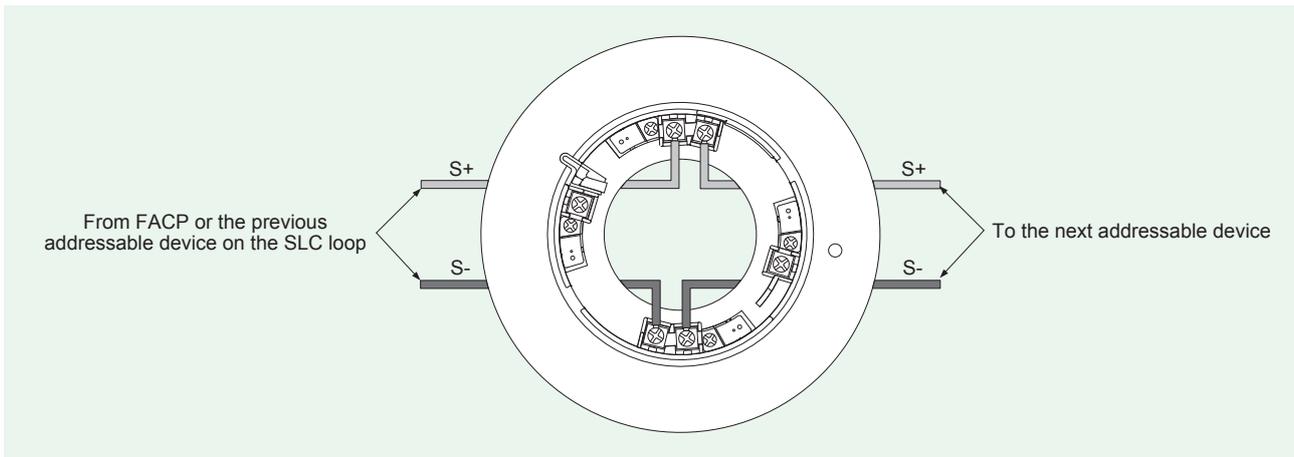

### NOTE

- The information contained herein does not purport to cover all the details or variations of the equipment described, nor to provide for every possible contingency that may be met in connection with its installation, operation or maintenance.
- Specifications are subject to change without notice. Contact Nohmi before relying on the information.
- Actual performance is based on proper application of the product by a qualified professional.
- Should further information be required or should particular concerns arise that are not covered sufficiently for the purchaser's purposes, the matter should be referred to Nohmi or your nearest distributor.

**NOHMI**  
NOHMI BOSAI LTD.

- Head Office: 4-7-3 Kudan-Minami, Chiyoda-ku, Tokyo 102-8277, Japan
  - Phone: (81)3-3265-0231
  - F A X: (81)3-3265-5348
- URL <https://www.nohmi.co.jp/english/>

Contact